

Test Valley Windows

Advanced Plus

Folding Sliding Doors

Folding Sliding doors help you to create an open, flexible and modern space for both living and working environments.

www.testvalleywindows.co.uk



Showroom
17-18 Glenmore Business Park
Andover
Hampshire
SP10 3GZ

Tel: 01264 335599
Email: enquiry@testvalleywindows.co.uk

www.testvalleywindows.co.uk




Advanced Plus Folding Sliding Door


Let our Folding Sliding doors transform the way you live your life. Whether you choose to relax in a stylish open plan living area or you want to create beautifully panoramic views from any room, Folding Sliding doors from the Beaufort Range provide you with versatility and flexibility you need to create a relaxing and ambient environment.

Design Features


- Internally beaded with a softline detail to all external doors and panels
- Chamfered and square bead options
- 4 stainless steel wheels ensures smooth and consistent operation

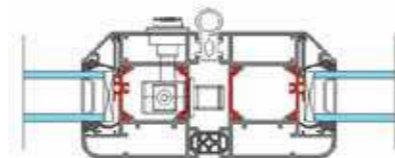


Interlock Detail

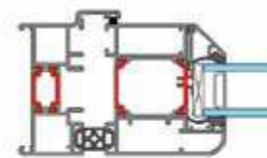

Jamb Detail

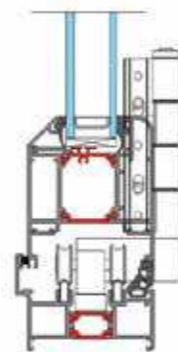

Cill Detail

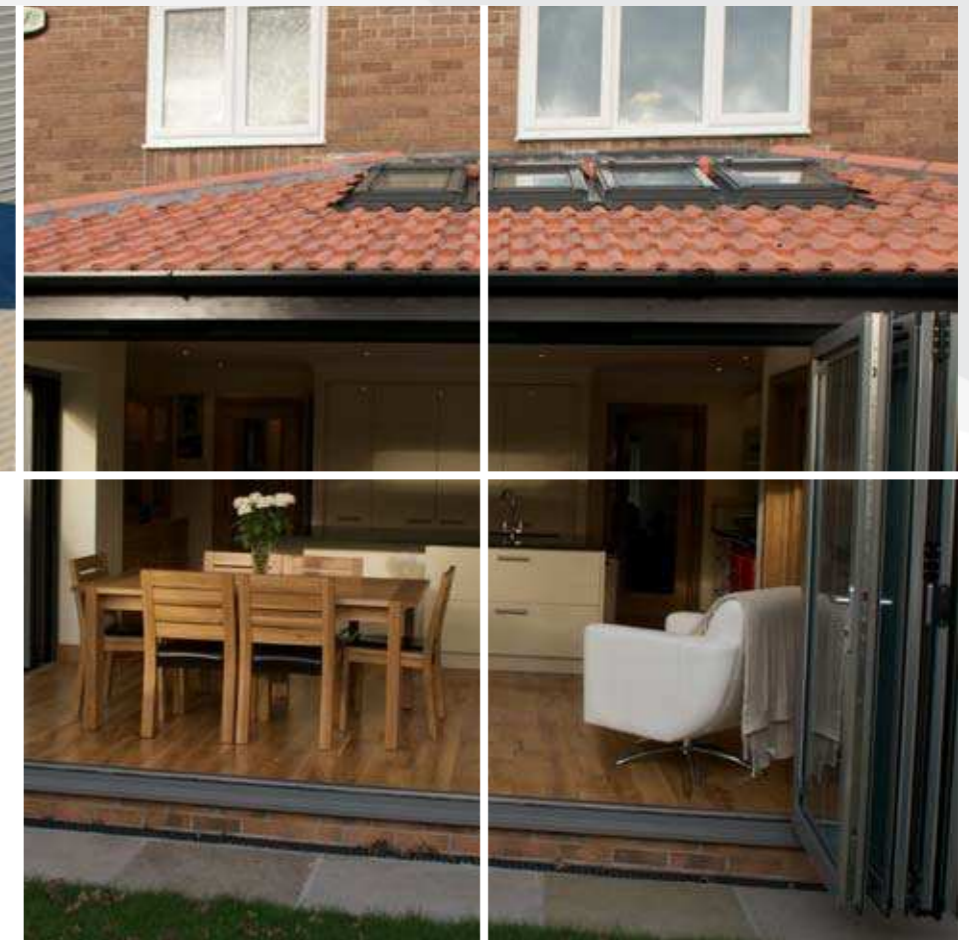

Sizing

Minimum Height	Maximum Height
1600mm	3000mm**
Minimum Width	Maximum Width
1600mm	6500mm**
Maximum Sash Weight	
100kgs**	


Variations
Individual panel width not to exceed 1000mm
Panels heights, widths and weights are dependent on style and design.
**The sizes detailed above are for guidance only.
Please contact our Technical Office for further details

Options

- Doors and panels can be used in any configuration, style and design
- All configurations are available in both open-in and open-out options
- Full range of suited hardware available
- Glazing sizing range of 28mm – 44mm
- Available in any single RAL colour or dual colour option

Configurations

Available in a range of styles and designs, panels can be stacked inside or outside of the room, to the left, right or split to stack on both sides. Door sets can be manufactured to replace entire walls to maximise your opening space.

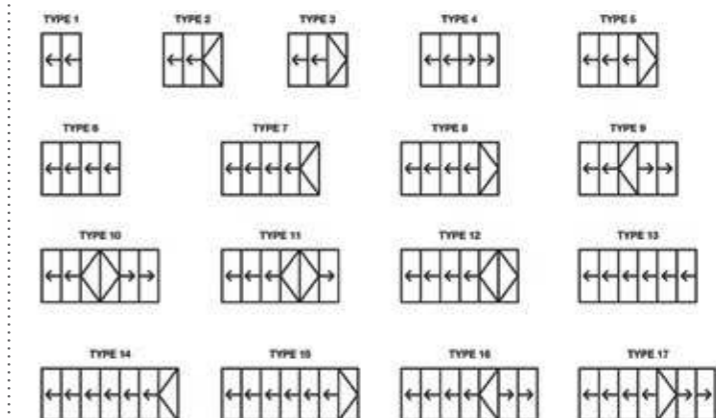

Performance

- High security hinges and locking mechanisms as standard
- Shootbolts top and bottom of the interlocks for enhanced security
- Unique high strength roller design for increased weight capacity
- Dedicated Bottom bogey guide for consistent operation and increased security
- Double Track threshold allowing greater stability
- Door U Value 1.7 w/m²K